



(H)03 VH-H

PVC twin cable

RoHS

CROSS SECTION

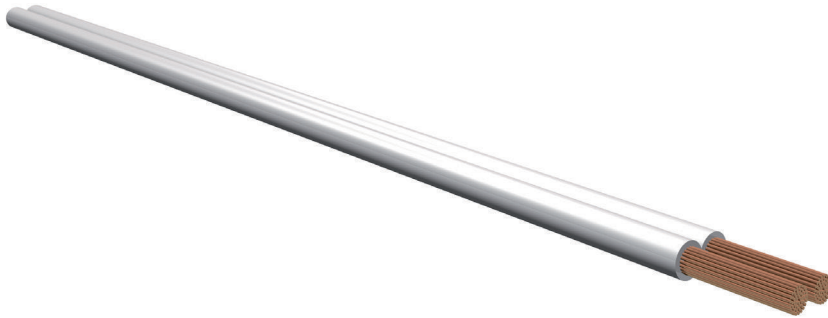

Acc. to VDE 0281

APPLICATION

For very low mechanical loads in households, kitchens, offices and for the connection of light electrical appliances. Not suitable for cooking and heating appliances.

STRUCTURE

Conductor Flexible copper conductor according to VDE 0295 class 6
Insulation sheath According to VDE 0207 part 4 type Y12

SPECIAL FEATURES

Sheath colour
White, black brown and gold

TECHNICAL DATA

Nominal voltage 300 V
Test voltage 2000 V
Maximum permissible operating voltage in rotary-phase and single-phase alternating current systems U_0/U 330/330 V
Direct current systems U_0/U 495/495 V

ELCΔ3

sterk in kwaliteit

Product description	Cu weight	Outer Ø (mm)	Weight (kg/km)
(H) 03VH-H 2x0.75 PVC twin cable	14.4	3.2 x 6.4	36